

MULTI-PURPOSE WEATHERSEAL TAPES

Packaged Rolls



All adhesive backed tapes have a limited shelf life. These products must be used within 6 months of purchase & must be stored between 50° & 100° Fahrenheit (10° & 37.77° Celsius).

Open Cell Polyurethane A/B Tapes

	thickness	width	
DS831R	3/16"	x 3/8"	x 16.5 ft. grey (4.7mm x 9.5mm x 5.02m)
DS835R	1/4"	x 1/2"	x 16.5 ft. grey (6.4mm x 12.7mm x 5.02m)
DS837R	3/8"	x 3/8"	x 16.5 ft. grey (9.5mm x 9.5mm x 5.02m)

Neoprene Closed Cell Sponge A/B Tapes

	thickness	width	
DS861R	3/16"	x 3/8"	x 10 ft. black (4.7mm x 9.5mm x 3.04m)
DS863R	1/4"	x 1/2"	x 10 ft. black (6.4mm x 12.7mm x 3.04m)
DS864R	5/16"	x 3/8"	x 10 ft. black (8mm x 9.5mm x 3.04m)
DS865R	5/16"	x 3/4"	x 10 ft. black (8mm x 19mm x 3.04m)
DS866R	3/8"	x 3/8"	x 10 ft. black (9.5mm x 9.5mm x 3.04m)
DS868R	1/2"	x 1"	x 10 ft. black (12.7mm x 25.4mm x 3.04m)

PVC Closed Cell Soft Foam A/B Tapes

	thickness	width	
DS847R	3/8"	x 3/8"	x 16.5 ft. grey (9.5mm x 9.5mm x 5.02m)
DS848R	3/8"	x 3/4"	x 16.5 ft. grey (9.5mm x 19mm x 5.02m)

XI Cell/Cross-Linked Polyurethane A/B Tapes

	thickness	width	
DS852R	1/8"	x 3/8"	x 16.5 ft. white (3.2mm x 9.5mm x 5.02m)

Camper Truck Tape-Closed Cell Sponge Vinyl A/B Tape

	thickness	width	
DS885R	3/16"	x 1-1/4"	x 30 ft. grey (4.7mm x 32mm x 9.14m)


Bulk Rolls

All adhesive gaskets have a limited shelf life. These products must be used within 6 months of purchase & must be stored between 50° & 100° Fahrenheit (10° & 37.77° Celsius).

Neoprenes (Black)

	thickness		width			
DS61-50	1/8"	x	3/8"	x	50 ft. BL	(3.2mm x 9.5mm x 15.24m)
DS67-50	1/8"	x	1/2"	x	50 ft. BL	(3.2mm x 12.7mm x 15.24m)
DS74-25	5/16"	x	3/4"	x	25 ft. BL	(8mm x 19mm x 7.6m)
DS76-12.5	1/2"	x	3/4"	x	12.5 ft. BL	(12.7mm x 19.5mm x 3.8m)
DS78-50	1/4"	x	1"	x	50 ft. BL	(6.4mm x 25.4mm x 15.24m)
DS79-12.5	1/2"	x	1"	x	12.5 ft. BL	(12.7mm x 25.4mm x 3.8m)

OVERHEAD VIEW

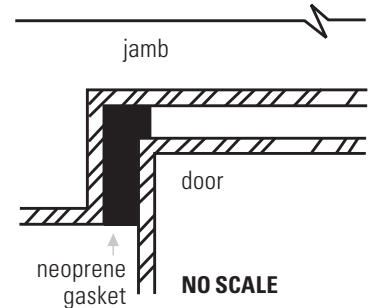

Backer Rod

Sealant backer rod is an extruded round, grey, closed-cell low-density polyethylene foam with a skin-like outer texture. It is an ideal non-absorbent, compressible, back-up material inserted into a joint to control sealant tooling, to allow proper sealant wetting of the joint surfaces, & to yield proper bond breaker between the backup material & the sealant. Commonly used in glazing operations, window & door applications, expansion joints, curtain wall joints, partitions, log construction, pavement joints & repairs, precast units, & copings.

Available in Footage or Bulk Coils.

DSROD1/4	1/4"	(6.3mm)	diameter	4000 ft (1219m)	per carton
DSROD3/8	3/8"	(9.5 mm)	diameter	2100 ft (640m)	per carton
DSROD1/2	1/2"	(12.7 mm)	diameter	2500 ft (762m)	per carton
DSROD3/4	3/4"	(19mm)	diameter	1100 ft (335m)	per carton
DSROD1	1"	(25.4mm)	diameter	600 ft (182m)	per carton

