

Santoprene Adhesive-Backed Gasketing


For Wood Door & Metal Frame

This design is for those applications with very tight clearances from door edge to jamb & the pressure to close the door is critical.

adhesive backing

15/64" (5.8mm) 25/64" (10mm) Bronze DS22D17 17 ft. (5.18m) DS22D25 25 ft. (7.62m) DS22D21 21 ft. (6.40m) DS22D515 515 ft. (156.97m)

All adhesive gaskets have a limited shelf life. These products must be used within 6 months of purchase & must be stored between 50° & 100° Fahrenheit (10° & 38° Celsius).

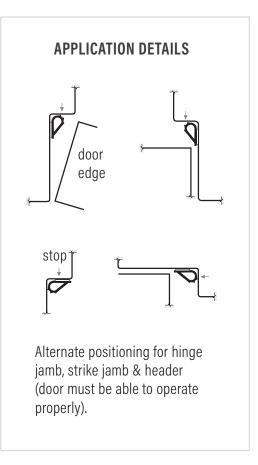

WWW.DRAFTSEAL.COM | INFO@DRAFTSEALKT.COM Head Office: Langley, B.C., Canada | Branch Offices: Toronto, Canada & Los Angeles, USA

© COPYRIGHT A.K. DRAFT SEAL LTD * This drawing remains the property of A.K. Draft Seal Ltd. and all its affiliates. The information contained in this drawing is not to be disclosed to any party without written approval from A.K. Draft Seal Ltd.