DS1 Storm (Gen 2) - Inswing Sill System, Pre-hung Door Application

DS752 Application is used for 2-1/4" (57mm) door thickness

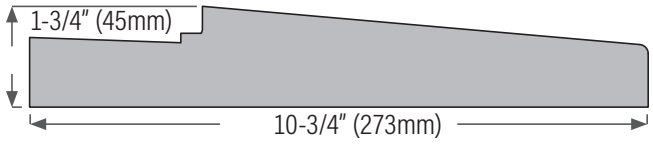

DSISSGASKET214

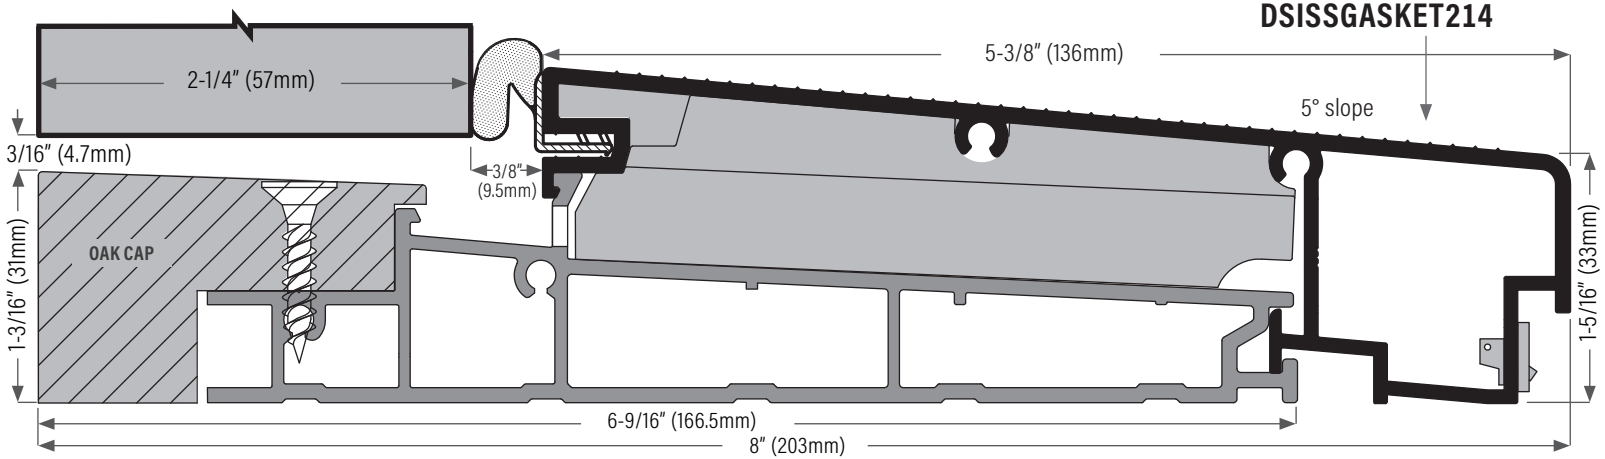

DS752A20AK Mill finish with oak cap for 2-1/4" (57mm) door
DS752D20AK Bronze anodized with oak cap for 2-1/4" (57mm) door



DS750SILLPLUG
for DS750 &DS752 sills

Oak cap for 1-3/4" (44.45mm) door thickness

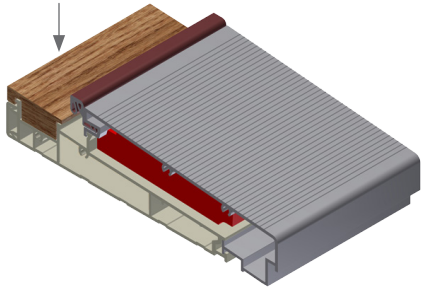

WWW.DRAFTSEAL.COM | INFO@DRAFTSEAL.COM
Head Office: Vancouver, Canada | Branch Offices: Toronto, Canada & Los Angeles, USA

© COPYRIGHT A.K. DRAFT SEAL LTD ✱ This drawing remains the property of A.K. Draft Seal Ltd. and all its affiliates. The information contained in this drawing is not to be disclosed to any party without written approval from A.K. Draft Seal Ltd.